

GLOBAL Trac Adapter GA300

Quality in Focus



New small adapter for
Global Trac Pro

Smallest adapter available

Inspires to new luminare design

pat. pend.




GLOBAL Trac Adapter GA300

Adapter GA300 for GLOBAL Trac Pro XTS(F)

Available colours:

-1 grey (RAL7040), -2 black (RAL 9005), -3 white (RAL 9010).

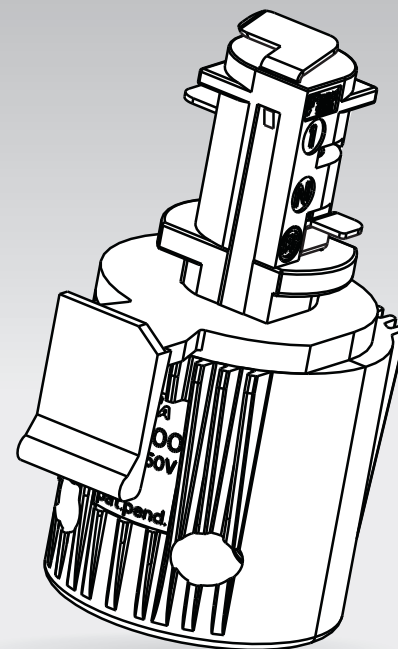


Type	EAN-code	Colour	Package/Piece
GA300-1	64100 14 530 43 -3	Grey	1/100
GA300-2	64100 14 530 44 -0	Black	1/100
GA300-3	64100 14 530 45 -7	White	1/100
GA300L-1	64100 14 530 46 -4	Grey	100
GA300L-2	64100 14 530 47 -1	Black	100
GA300L-3	64100 14 530 48 -8	White	100
GA300B-1		Grey	100
GA300B-2		Black	100
GA300B-3		White	100

3-circuit adapter. Phase selection by hand. Phase 2 preassembled in factory.

- 3A, 250V, class I
- Max. pull strength 50 N
- Max. torque 2,5 Nm
- Slot connection, to be used with stranded wire 0,5 ... 1,0 mm²
- Slot plugs included
- Nordic Aluminium's standard nipples to be used
- V0 fire protected materials
- FI, CCA certified by SGS Fimko
- RoHS compliant
- pat. pend.
- cable grip CG100 can be used



*GA300B adapter
can be used with
trafo / LED driver boxes*

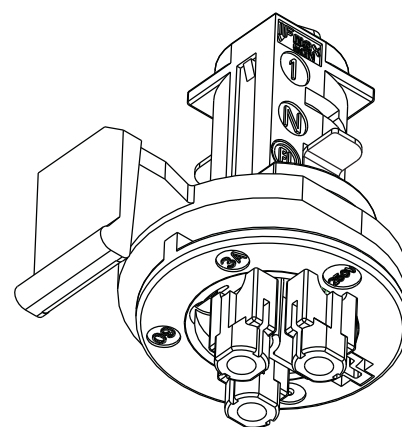

GA300B